



KSTR-SAMA5D27 - SINGLE BOARD COMPUTER

Extremely small form factor Single Board Computer.
Based on Microchip ATSAMA5D27 SoC.
Featuring Arm® Cortex®-A5 500 MHz.

All in one SBC, smaller than a credit card. Rich feature set with efficient power consumption. Ideal for secure node computing and IoT solutions.
Advanced security with hardware cryptographic acceleration and on-chip RAM. Protects your code and data at all times.

Operates directly from a Li-Ion or Li-Poly battery, provides charging and temperature monitoring of the cell.

Capable of several low-power states to ensure long off-grid operation.

10/100 Mbit/s Ethernet, 54 Mbit/s Wi-Fi b/g/n, Bluetooth 4.1 LE, Stackable GPIO headers.

USB Type-C connector providing power and access to the USB OTG controller.

Dimensions:




- 50 x 70 mm

Software support:

- Linux kernel 4.14 to 5.16 and newer
- Ubuntu 20.04 LTS
- U-Boot
- AT91Bootstrap
- Buildroot
- Yocto and other distributions on request
- FreeBSD 13 on request
- FreeRTOS

Applicable for:

- Secure IoT with physical tamper protection
- Intelligent Factory
- Machine Control
- Wireless Meshes
- Smart Grid
- Human Habitat Automation
- Handheld Devices and Human Interfaces
- Network Gateways

-  conclusive.pl
-  sales@conclusive.pl
-  Ligocka 103/3
40-568 Katowice, POLAND







Small and efficient
Single Board Computer



KESTREL

KSTR-SAMA5D27

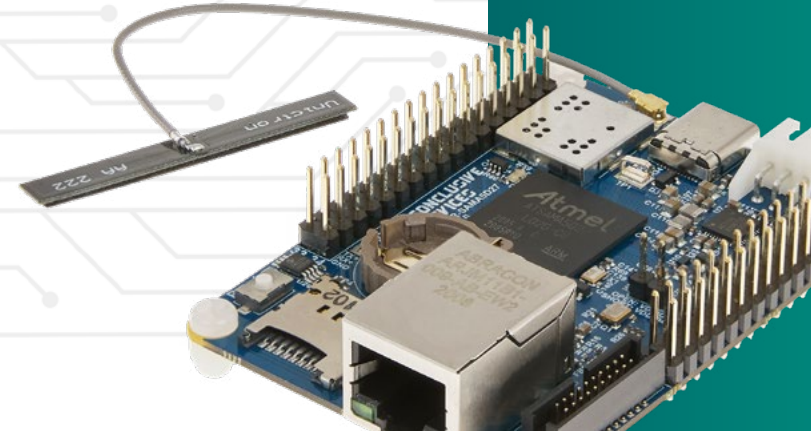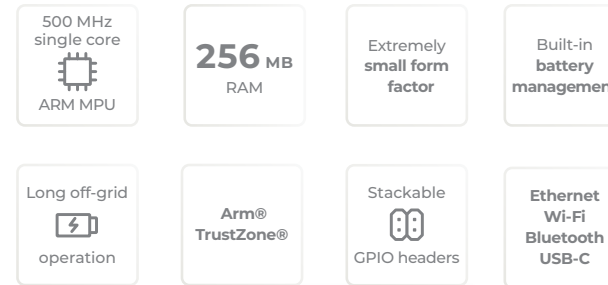

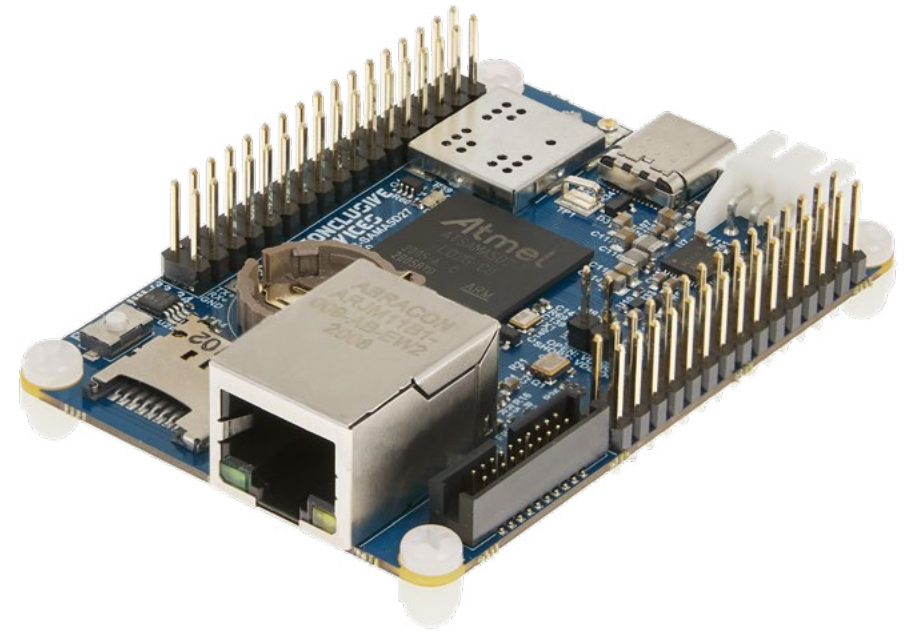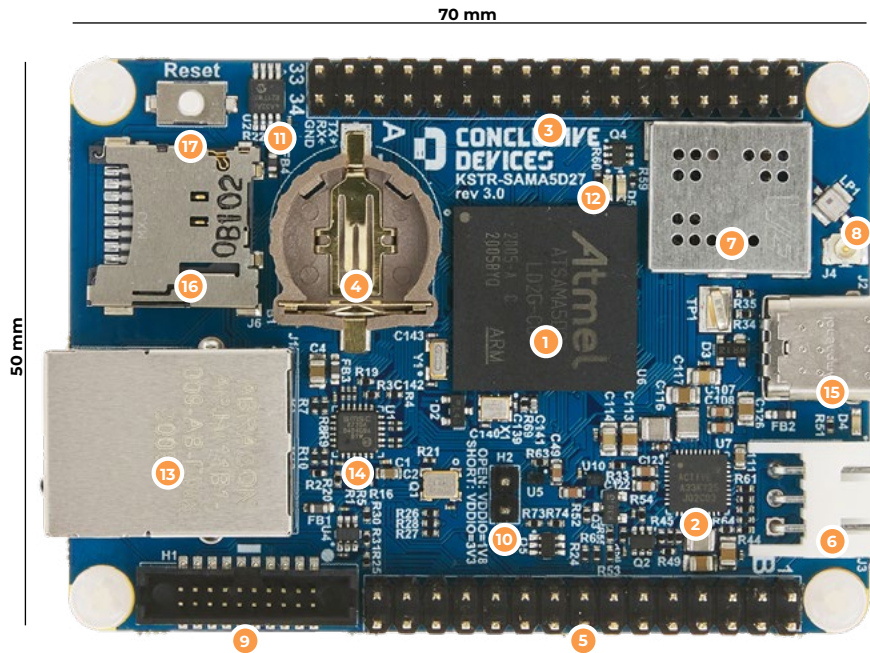

1 System on Chip

- Microchip SAMA5D27
- ARM® Cortex®-A5
- 500 MHz, 1 Core, 32-Bit
- L1 Cache 32 KB
- L2 Cache 128 KB
- 256 MB LPDDR2 SDRAM
- ARM TrustZone
- Secure Boot
- Hardware encryption engine
- Memory Integrity Monitor
- Real-time clock on-die
- <200 µA low power state with fast wake up
- 5 µA backup mode

2 Battery management IC

- Powers board from battery
- Monitors battery charge level
- Charges battery
- Monitors battery temperature

3 I/O expansion header A

- 2 x 17 pins, 34 pins total
- 2.54 mm (0.1") pitch
- PDMIC audio input
- Timer I/O pins
- PWM pins
- FLEXCOM interface
- Image Sensor Controller (ISC) for 10-bit and 12-bit sensors.
- Serial console UART

4 Coin battery holder

- Type CR1220
- Upkeep for:
 - Real-time clock
 - Slow Clock Oscillator
 - System Controller

5 I/O expansion header B

- 2 x 15 pins, 30 pins total,
- 2.54 mm (0.1") pitch
- Power supply pins:
 - 3.3 V, 2.5 V, 1.8 V
 - 5.0 V directly from USB-C
- Battery power output
- I²C
- CAN
- 4-channel PWM
- USB
- FLEXCOM
- 6 channel ADC with Vref

6 2.5mm XHP-3 battery connector

- Li-Ion / Li-Poly battery
- Direct connection to cell, no BMS required
- Temperature monitor pin
- Provides cell charging
- Solder pads on reverse

7 Wireless communication module

- 2.4 GHz WLAN IEEE 802.11 b/g/n
- Bluetooth 4.1

8 Wireless antenna u.fl connector

9 Conclusive Developer Cable connector

- 1.27 mm pitch 20-pin connector
- Provides access to:
 - System UART
 - JTAG port
 - System I²C bus

10 VDDIO voltage switch pins

- 3.3 V or 1.8 V selection

11 EEPROM

- 4 KB
- Available via I²C
- Pre-programmed with MAC address and unique serial number

12 Status LEDs

- Power indicator
- System Heartbeat
- User programmable

13 Ethernet

- 10/100 Mbit/s
- RJ45 Connector

14 10/100 Ethernet PHY IC

15 USB Type-C connector

- Device Mode
- Power Supply

16 MicroSD card connector

- SDHC and SDXC supported
- up to UHS-I SDR104
- Boot source

17 Reset switch

- Full hard reset of all power sections